

DCU 410E Control Unit




At a glance

- New 5.7" Colour screen with increased resolution and colour definition
- Latest 1Ghz Dual Core CPU provides lightning response
- 8 configurable switch inputs
- 4 configurable 4.20ma inputs
- 4 configurable PT100 inputs
- Dual J1939 interfaces
- New 0-5V inputs

Why customers select the DCU 410E

- Hi resolution colour display presents data clearly and precisely
- 11 selectable languages means operator understands the data
- Accepts multiple sensor standards and outputs
- Intuitively configurable using just a web browser
- Provides programmable engine control logic
- Approved by 8 Classification Societies



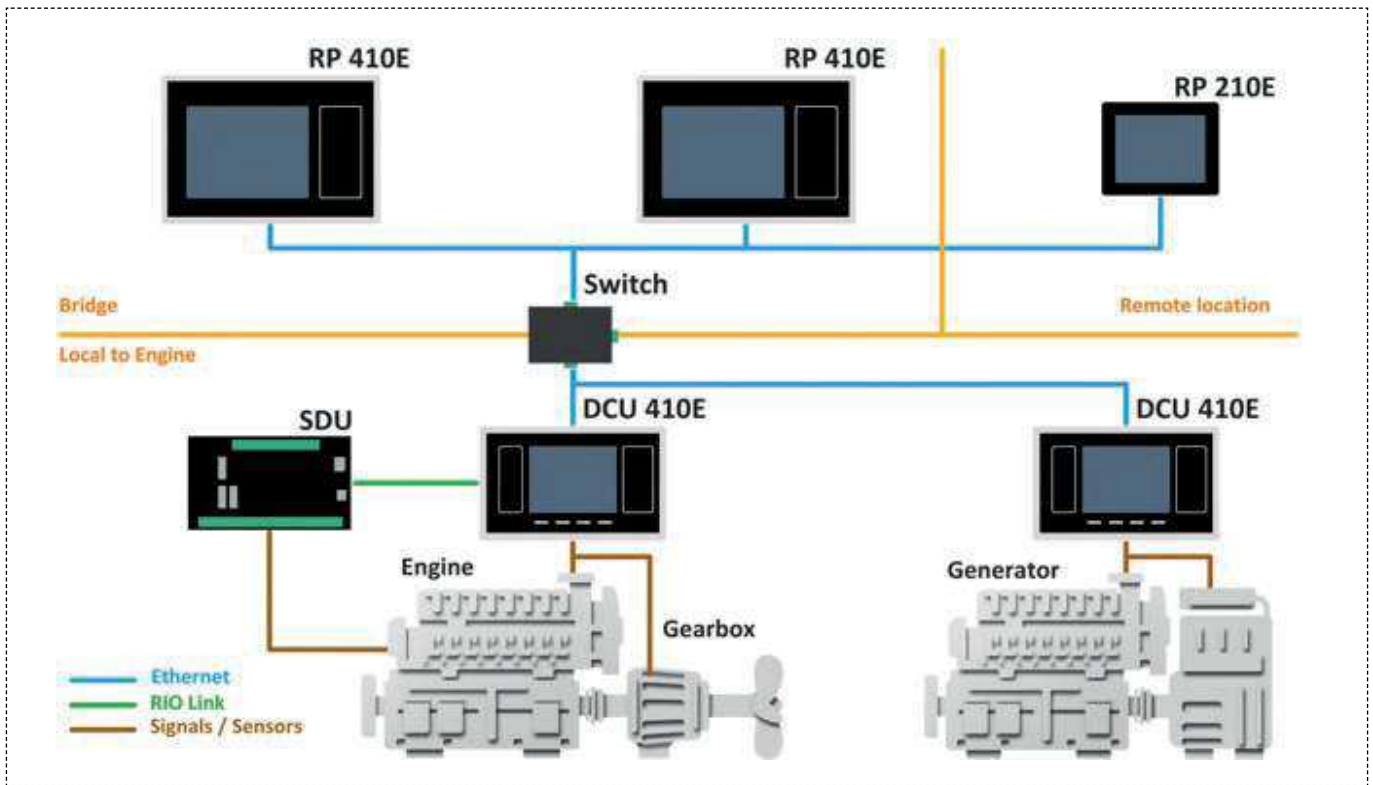

Features and Benefits

Same hardware for many applications

- Can hold over 40 customer selectable configuration files
- Connectable to multiple engine types and or ships systems
- Suitable for fixed and variable speed applications
- Multiple standard I/O's and outputs

No specialist skills required

- 11 languages as standard inc Chinese and Russian
- No special tools
- No special software, just an internet browser
- Preloaded configurations

Ability to communicate with whole ships systems

- Ethernet connected means literally "plug & Play"
- Simple two wire Modbus connectivity when needed
- Expandable to include other vessel parameters

Accountability

- Secure historical event and alarm list
- Displays J1939 faults in real text
- Can link to third party Ship management and remote telemetry systems
- New screen provides clear precise information to operator

Auto-Maskin AS
 Hvamsvingen 22
 NO-2013 SKJETTEN
 Norway
 Phone: (+47) 64 84 52 00
 Fax: (+47) 64 84 52 12
 E-mail: office@auto-maskin.com
 Web: www.auto-maskin.com

Ordering Info

ITEM	PART NUMBER
DCU 410E	1006445
DCU 408	1006455
SDU 410	1006451
RIO 410	1006453
RIO 425	1006457
RP 410E	1006446
MK-14	1121252