

RPS Redundant Power Selector




At a glance

- Selects between primary and secondary 24 VDC inputs
- Provides one 24 VDC / 16 A (max) supply output
- Dry contacts for Primary & Secondary input monitoring
- Rapid switching protects critical equipment
- Internal smoothing circuits during changeover
- Returns supply to Primary on resumption of power
- DIN Rail mounting eases integration
- Type Approved

Why customers buy the RPS

- Protects critical equipment during power supply disruption
- Provides external indication of power supply status
- Reduces operational risk
- Fast changeover reduces upstream component stress
- Easy retrofit / upgrade
- Compatible with all equipment



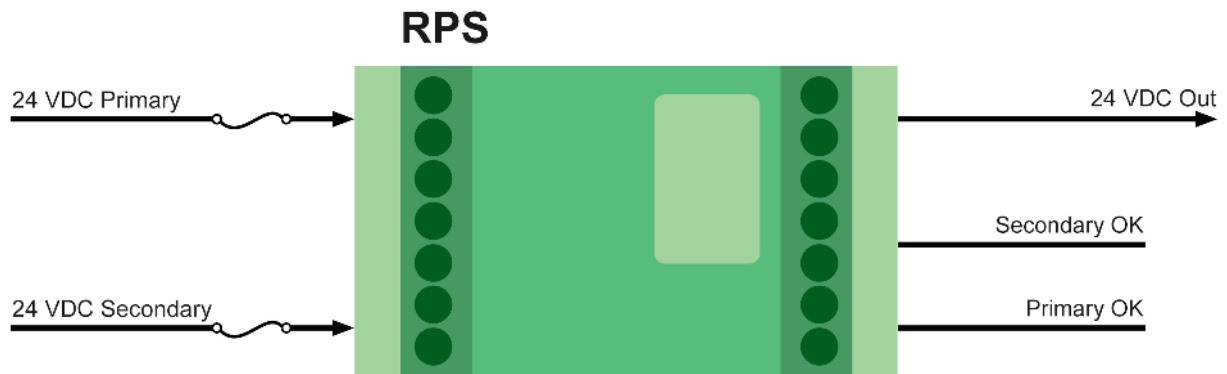

Features and benefits

Reduced operational risk

Protects critical components during power changeovers

Fast change over reduces chances of equipment loss

Uptime focused

Reduced technical risk

Ensures uninterrupted supplies

Improved power quality during changeover

Solid state construction improves durability and reliability

Ease of installation

DIN rail mounted

Screw terminal connections

Solid, durable IP rated enclosure

No special tools or cabling

User friendly

No user configuration required

External indicators for both supplies status

Defaults to primary supply with indicator

Compatible with any 24 VDC power source

Sales Scandinavia

Phone: (+47) 64 84 52 00
E-mail: sales@auto-maskin.com

Sales Europe, Asia, Africa, Australia

Phone: (+44) 1933 234 930
E-mail: sales.uk@auto-maskin.com

Sales North and South America

Phone: +1 (832) 738-1024
Skype: +1 (281) 724-8630
E-mail: sales.us@auto-maskin.com

Ordering info

Item	Part number
RPS Redundant Power Selector	1311229