

RP 210E Colour Touchscreen




At a glance

- 5,7" colour touch screen, 640 x 480 pixel
- Ethernet port for connection to network and/or DCU engine panel
- USB port available
- IP56 front and back
- 12V or 24V power supply
- Supports 1 DCU

Why customers select the RP 210E

- High resolution, colour touch screen display presents data clearly and precisely
- 11 languages changeable by one button at any station
- USB port allows quick and easy updating/downloading of data configuration
- Configurable templates to match applications & users
- Small size reduces cost and has less impact on crowded consoles
- Literally "Plug and Play" – auto configuring greatly reduces installation/commissioning costs



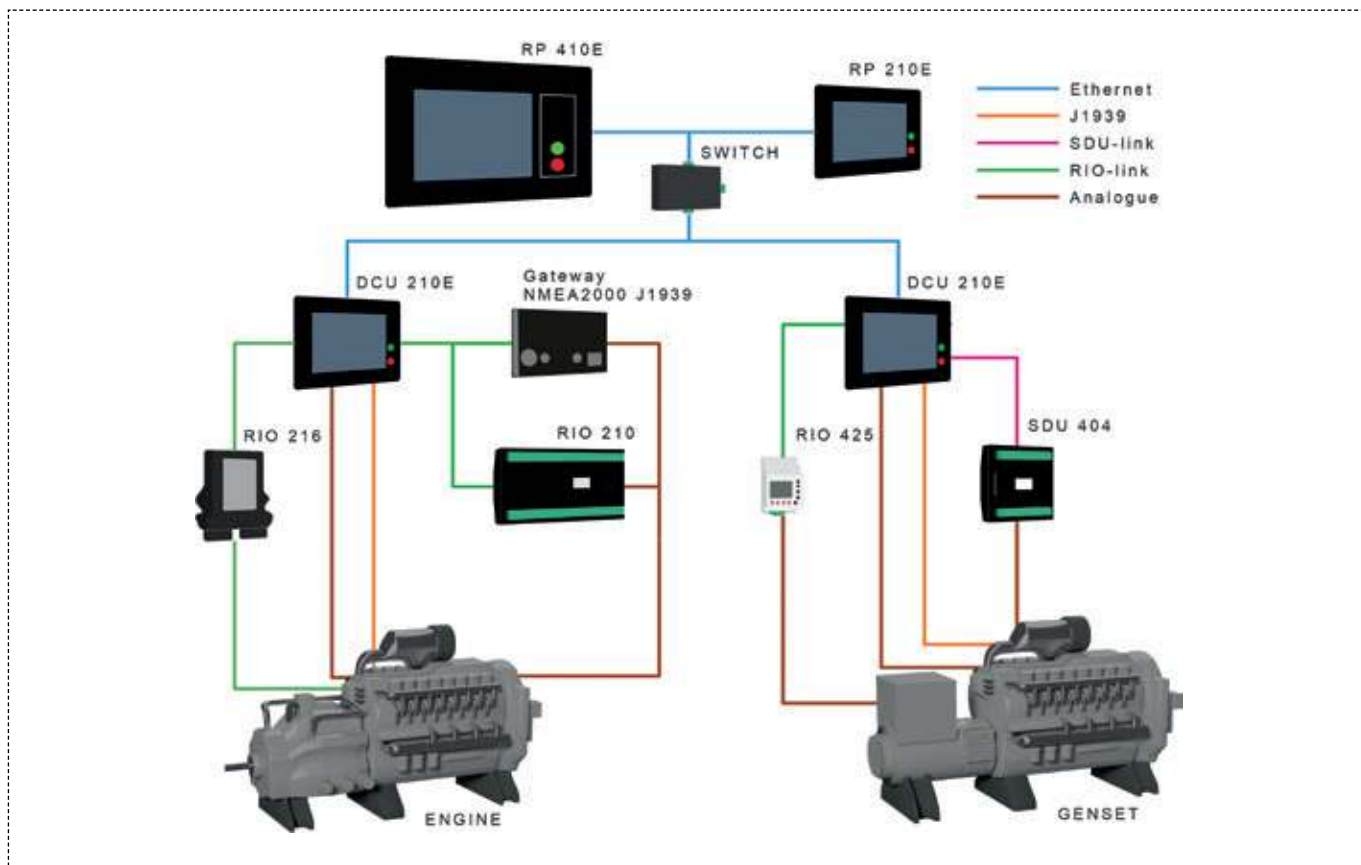

Features and Benefits



Clear, precise indications

5.7" touchscreen panel, 640 x 480 pixel

Intuitive operation via icons instead of text



Ease of installation

Communicates via Ethernet – only one cable required

No special tools to connect
Updated by just a USB stick



No user configuration required

Automatically configures itself when connected to a DCU

Automatic "conflict" notification if new configurations loaded elsewhere



Multiple monitoring positions

No practical limit to number of monitoring positions

1200 m installation limit from DCU
Multiple languages (11) including Chinese and Russian installed

Auto-Maskin AS
Hvamsvingen 22
NO-2013 SKJETTEN
Norway
Phone: (+47) 64 84 52 00
Fax: (+47) 64 84 52 12
E-mail: office@auto-maskin.com
Web: www.auto-maskin.com

Ordering Info

ITEM	PART NUMBER
DCU 210E	1006475
DCU 208E	1006477
RP 210E	1006476
RIO 210	1006462