


---

# Wheel loaders axles

<b>Machine operative weight</b> kg	<b>Engine power</b> kW	<b>Front axle model</b>	<b>Rear axle model</b>
7,000	70	28.32	28.32
8,500	81	28.44	28.44
10,000	96	28.56	28.56
12,500	118	28.64	28.64

---

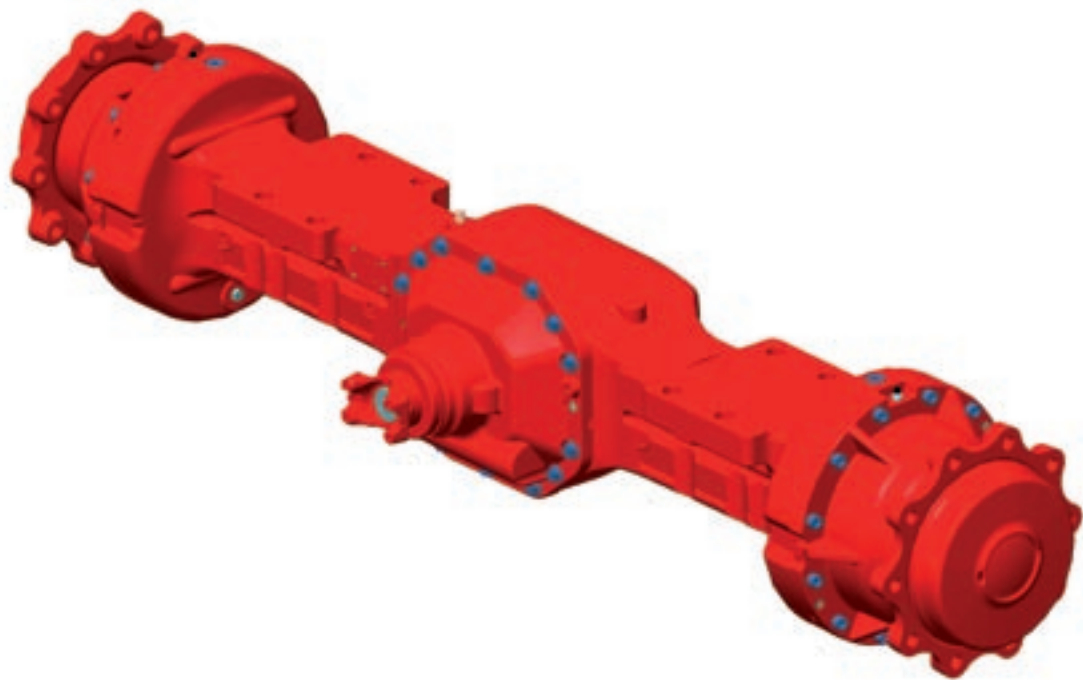

MODEL		<b>28.32</b>	<b>28.44</b>
Overall width	mm	2,050	1,930
Flange to flange distance	mm	1,800	1,800
Wheel mounting dimension	mm	n° 10 M22x1.5 on 335 mm ø	n° 10 M22x1.5 on 335 mm ø
Peak torque	kNm	44.8	62
Dynamic load capacity	kN	100	110
Static load capacity	kN	250	275

MODEL		<b>28.50</b>	<b>28.56</b>	<b>28.64</b>
Overall width	mm	1,930	2,070	2,070
Flange to flange distance	mm	1,800	1,930	1,930
Wheel mounting dimension	mm	n° 10 M22x1.5 on 335 mm ø	n° 10 M22x1.5 on 335 mm ø	n° 12 M22x1.5 on 425 mm ø
Peak torque	kNm	70	78	88
Dynamic load capacity	kN	110	120	140
Static load capacity	kN	275	300	350

---

**ALL MODELS AVAILABLE WITH**

Frame MTG	Rigid with pads / Offset oscill. ACP
Service brakes	Wet immersed disc

---