

# Swichgauge® Shutdown Panels with Open Back for Diesel Engines

## WD300 Series

### WD300 Series

The universally applicable WD300 Series panels are the ideal control solution for a wide variety of diesel engines without shutdown solenoid in the injection pump.

The standard WD300 Series panel includes basic engine protection for low oil pressure and high coolant temperature. It also includes Murphy's SV Series solenoid fuel shut-off valve, (see bulletin SV-99026B).

### WD300LV Models

For engines that have the fuel shutoff solenoid built into the injection pump. This model is also applicable to battery ignition engines.

Panel Kits Include:

- Low lube oil pressure Swichgauge instrument
- High coolant/temperature Swichgauge instrument
- 117PH magnetic switch
- SV Series solenoid fuel shutoff valve
- PB128S emergency stop push button



WD300-LV

## Specifications

### Low Lube Oil Pressure Swichgauge:

- 0-100 psi (0-689 kPa) [0-6.89 bar]
- 1/8 NPT process connection

### High Coolant Swichgauge:

- 130-250°F (54-121°C)
- 48 in. (1.2 m) capillary
- 1/2 NPT process connection



### 117PH Magnetic Switch SV Series Solenoid Fuel Shutoff

Valve: 12 or 24 volt (specify)

Approximate Shipping Weight: 8 lbs. 8 oz. (3.9 kg)

Approximate Shipping Dimensions: 8.5 x 5.25 x 5.5 in. (216 x 133 x 140 mm)

## Dimensions

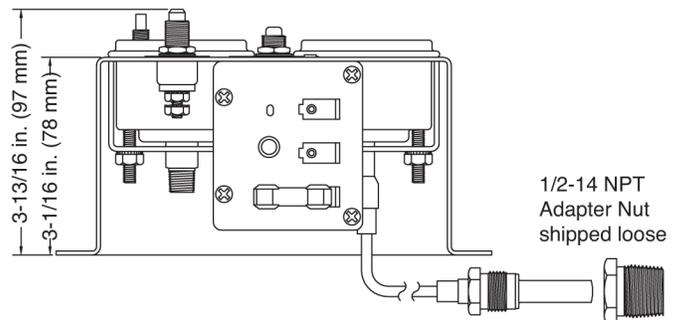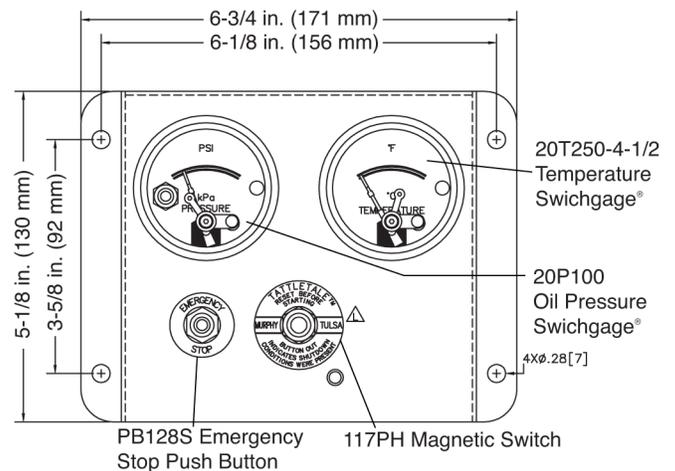

# How to Order

Options listed below. All configurations may not be available. Call your sales representative or Enovation Controls for more information.

**Notes:**

\* = Standard Component or Range and is not required for ordering. See section notes if section has two parts to specify.

- **WD300LV**: Does not include an SV Fuel Valve.
- **WD300**: Includes an SV Fuel Valve. (WD300-12 = 12-volt valve and WD300-24 = 24-volt valve)

If requirements are outside of the matrix, order panel with free-formed text and use the product number of the base model.

