Compact with big features
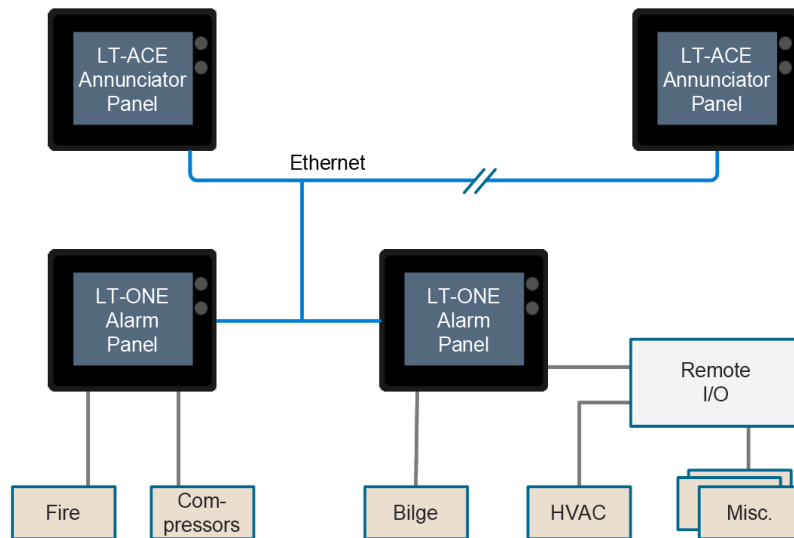
The Marine Watch LT Series is an unclassed vessel alarm system with no compromises. This robust system with an incredible list of features is ready to take you on a safe voyage and withstand any weather condition.

- ■ Full vessel alarm system
- ■ Clear graphics for quick and safe decisionmaking
- ■ Touch-screen and CCTV camera-support
- ■ All-in-one alarm panel with inbuilt I/O
- ■ No separate I/O cabinet needed
- ■ Configurable automation logic
- ■ Easy installation, no programming needed

LT-ACE Annunciator Panel — LT-ACE Annunciator Panel

Ethernet

LT-ONE Alarm Panel — LT-ONE Alarm Panel — Remote I/O

Fire — Com-pressors — Bilge — HVAC — Misc.

LT-ONE Alarm Panel

- Alarm operator panel with onboard flexible I/O
- Displays up to 60 alarms
- Event log, units and inbuilt languages
- Easy plug-in I/O expansion
- Inbuilt sensor troubleshooting
- Configurable automation logic
- Can display analogue gauges

WxHxD: 167 x 135 x 68 mm
         6.6 x 5.3 x 2.7 in

Part #: 1500074

PT100 2 | Relay 3 | FLEXI/O 21 | USB 1 | Ethernet 1
CANbus 2 | RIO link | SAE J1939 | Modbus TCP | Modbus RTU
Web config

12v 24v | IP56 | m ft C F
14 | 5.7" | touch

LT-ACE Annunciator Panel

- Auto-detects and self-configures with up to two LT-ONE Alarm Panels
- Unlimited number of LT-ACEs can be added
- Combined event list from all LT-ONEs
- CCTV support
- Compatible with 200 Series and 400 Series DCUs

WxHxD: 167 x 135 x 68 mm
         6.6 x 5.3 x 2.7 in

Part #: 1500120

LT Series | 200 Series | 400 Series
12v 24v | IP56 | m ft C F
14 | 5.7" | touch

USB 1 | Ethernet 1 | Relay 1 | 1 Cam | 2 LT-ONE

Neat and powerful

A Marine Watch LT Series system can be used in any unclassed vessel and display up to 120 alarms from a mix of sensor types. The LT-ONE Alarm Panel carries 19 flexible onboard I/O out of the box, making it a super neat and cost-effective system that is quick to install. Extension modules can be connected to increase the number of I/O signals.

The LT-ONE Alarm Panel can be used stand-alone or in combination with the LT-ACE Annunciator Panel that visualizes alarms from up to two LT-ONE. The LT-ACE automatically self-configures when connected to the same Ethernet network as the LT-ONEs.

Options

- RIO 210/410 Remote I/O Unit
- RIO 216 Remote I/O Unit
- RIO 412 Exhaust Temperature Interface
- RIO 425 AC Generator Interface
- LSU 408 Load Sharing Unit
- DCU 208E/210E Engine Controller
- On-site installation support

Sales EMEA and Asia

Phone: (+47) 64 84 52 00
Email: sales@auto-maskin.com

Sales North and South America

Phone: +1 (832) 738-1024
Email: sales.us@auto-maskin.com

Managing Energy